
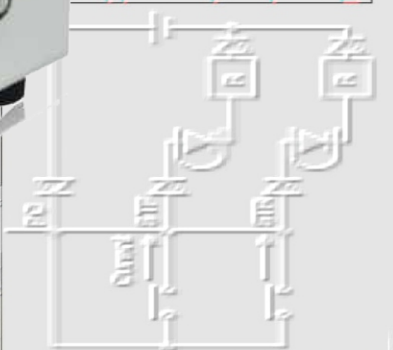
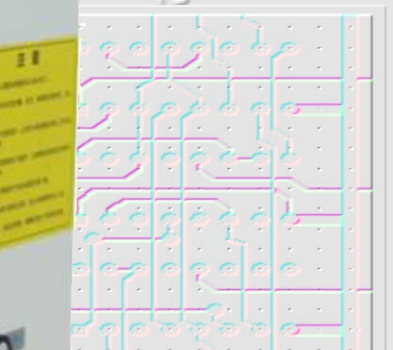
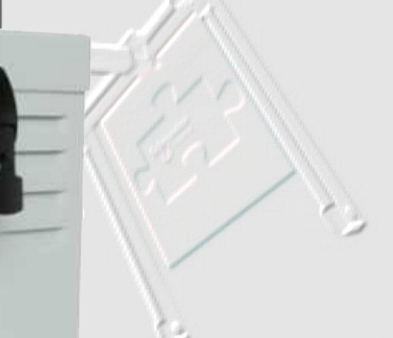
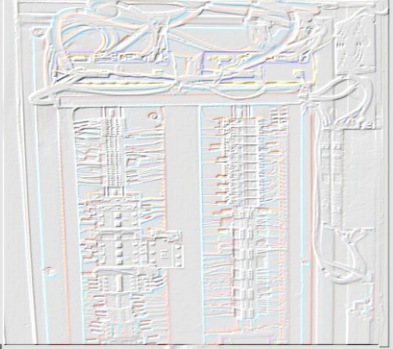
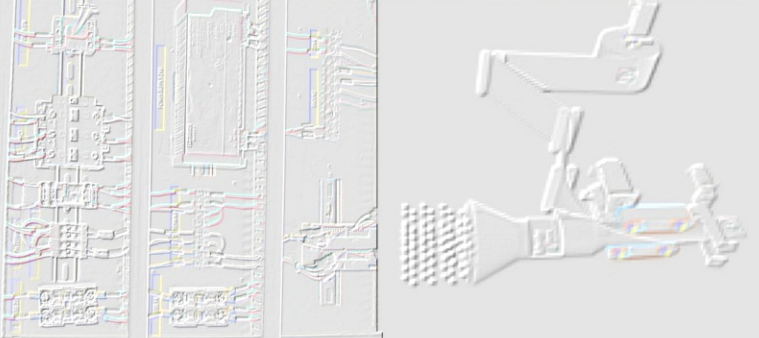
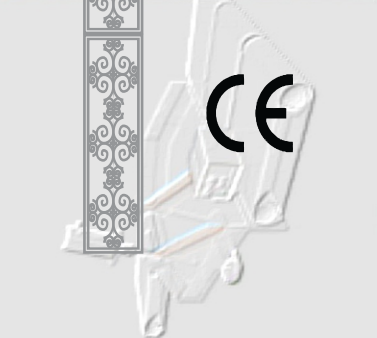


LOGILASE FI

LOGILASE FILTERS

LOGILASE FF300

COMPACT FUME & SMOKE EXTRACTOR AND FILTERING UNIT

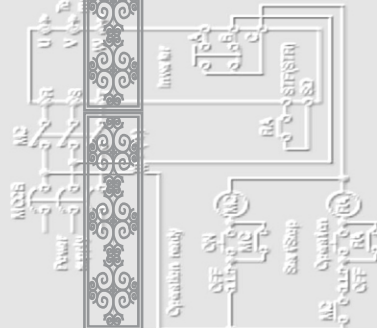

CE

LOGI MAT ION
TECHNOLOGIES, INC.

LOGILASE FF300

COMPACT FUME & SMOKE EXTRACTOR AND FILTERING UNIT



SPECIFICATION

Model	FF 300
Air Flow / Power consumption	500 m3/hour / 130 W, 110 V 60 Hz
Maximum Laser Working area	300x300 mm
Machine Dimension	415x255x450 mm
Machine Weight	16 kg NW
Air Pressure	2500 Pa
Filtration Rate	99.7 % @ 3 µm
Noise Rate	<55 dBA
Inlet size	63 mm with 1200 mm Flexible arm
Filtering stages	1- G4 Primary Filter 2- F8 Pre-Filter Dust Bag 3- H13 HEPA Filter 4- Activated Carbon Filter



G4 Primary Filter



F8 Pre Filter



H13 HEPA Filter



Activated Carbon